


# PRESS-FIT BUTTONS



## COUNTER BORE RELIEF

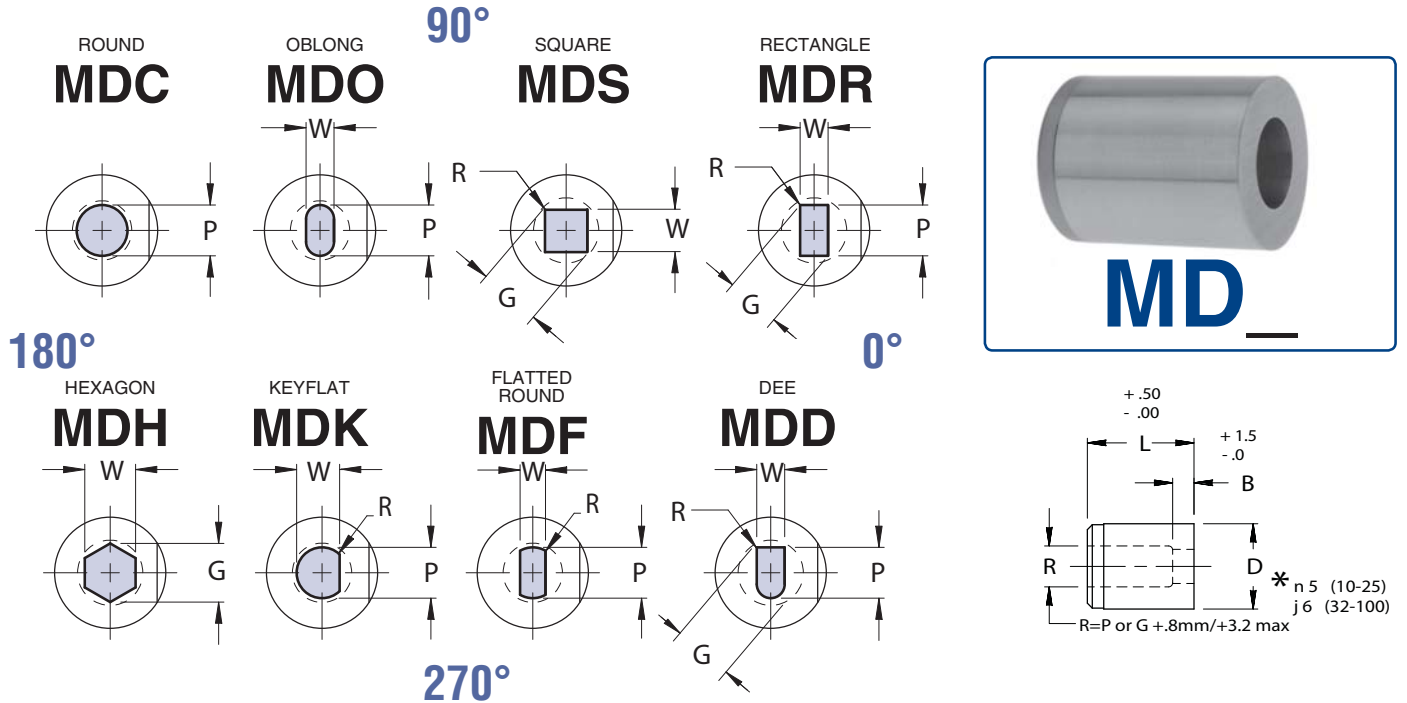

VIEWS ARE SHOWN LOOKING AT TOP FACE OF BUTTON.

Complete design & CAD files visit [WWW.MOELLERMCAD.COM](http://WWW.MOELLERMCAD.COM)

CATALOG TYPE	BODY DIA D	LAND LENGTH "B"			MAX DIA R	ROUND RANGE P	SHAPE		OVERALL LENGTH "L"							
		STD	ALT A	ALT B			MIN W	MAX G/P	20	22	25	28	30	32	35	
MD_08	8	4.0	8.0		4.0	1.50 - 3.20	1.50	3.20	X	X	X	X	X	X	X	X
MD_10	10	4.0	8.0		5.6	1.60 - 5.00	1.60	5.00	X	X	X	X	X	X	X	X
MD_13	13	5.0	8.0		8.0	1.80 - 7.20	1.80	7.20	X	X	X	X	X	X	X	X
MD_16	16	5.0	8.0		9.5	5.00 - 8.80	2.50	8.80	X	X	X	X	X	X	X	X
MD_20	20	5.0	12.0		12.0	5.50 - 11.00	3.20	11.00	X	X	X	X	X	X	X	X
MD_22	22	6.0	12.0		15.0	7.50 - 14.00	4.00	14.00	X	X	X	X	X	X	X	X
MD_25	25	6.0	12.0		17.5	9.50 - 16.50	4.80	16.50	X	X	X	X	X	X	X	X
MD_32	32	6.0	12.0		21.0	13.00 - 20.00	5.50	20.00	X	X	X	X	X	X	X	X
MD_38	38	8.0	12.0		27.0	16.00 - 26.00	6.40	26.00	X	X	X	X	X	X	X	X
MD_40	40	8.0	12.0		27.0	16.60 - 26.00	6.40	26.00	X	X	X	X	X	X	X	X

### Material

Steel: A2, HRC 58-60  
Alternate M2, HRC 60-63

### Standard Point Tolerance

Round P	+ .01 - .00		.01	P to D
Shape P, W	+ .02 - .0		.02	P to D

STANDARD FLAT LOCATION IS AT 0° AS SHOWN.  
AVAILABLE AT 90°, 180°, 270°, FOR SAME ALTERATION PRICE.

### ORDER EXAMPLE:

(Reference page 4)

SPECIFY:	QTY:	TYPE	"D"	"L"	"B"	P(OR P&W) DIMENSIONS	ALTERATION CODE	STEEL
EXAMPLE:	6	MDC	20	30	A	9.0	F2	A-2
EXAMPLE:	6	MDO	13	20	STD	6.0 x 3.0	F2	M-2

Note: When ordering, standard quantity breaks are: 1, 2-3, 4-11, 12-23, 24-49, 50-99

FOR SLUG CONTROL AND STANDARD ALTERATIONS SEE PAGES 59-63.